


CONSTRUCTION SPECIALTY PRODUCTS

Bostik has engineered specialty products for specific construction applications. Unique formulas of construction grade grout and mastic offer strength and durability for long-lasting performance.

BOSTIK MULTI-PURPOSE CONSTRUCTION GROUT 262

This economical, gas-expanding grout achieves high strength and precision grouting at consistencies from pourable plastic to dry-pack. Free from iron particles, chloride and gypsum, Bostik Multi-Purpose Grout 262 won't rust, shrink, corrode or ravel and looks similar to concrete. It provides excellent workability, ease of placement and high yield.

Applications include bases for heavy equipment and machinery, columns, beams, pre-cast wall panels, and securing anchor bolts and rods.

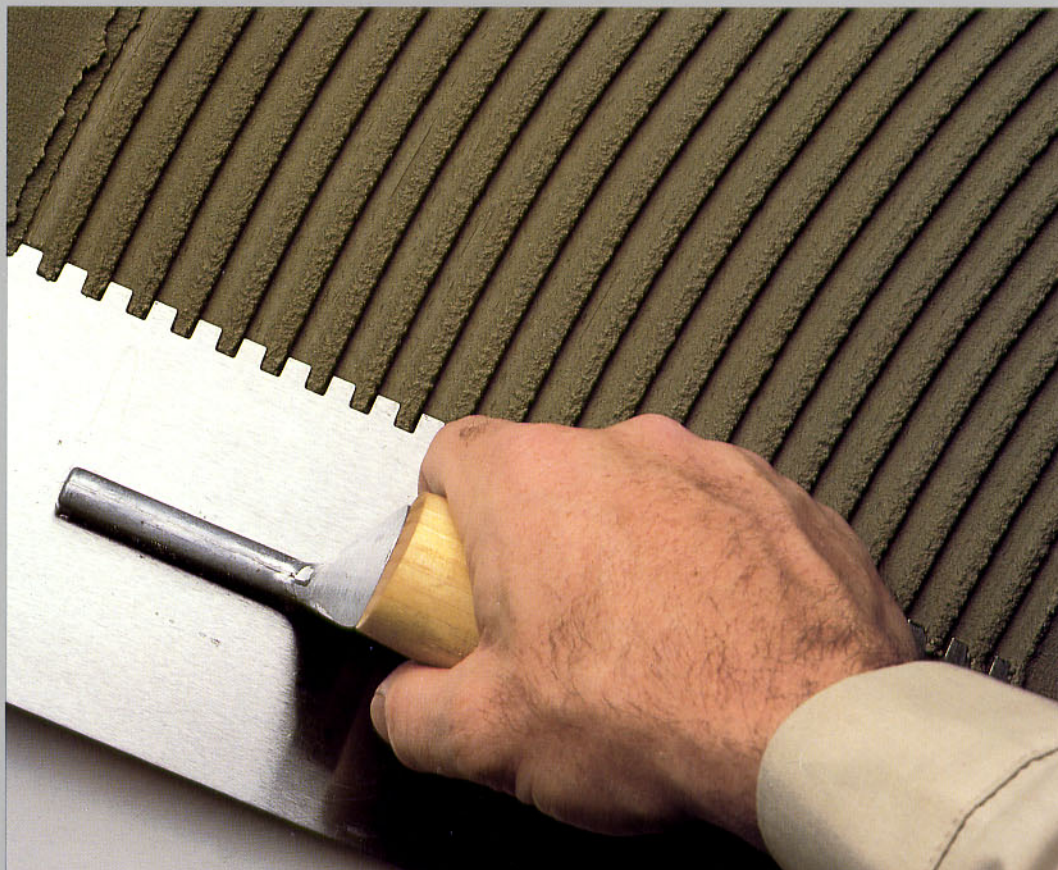

BOSTIK 7100 MASTIC

Bostik 7100 Mastic is a latex-based formulation that features excellent initial grab and workability with easy clean-up.

A Type I multi-purpose mastic, engineered from acrylic copolymer latexes, it conforms to ANSI Specifications for prolonged water resistance.

Bostik 7100 Mastic is designed for use over water-resistant gypsum drywall, exterior or marine grade plywood, dry concrete, cement backerboard, plaster and existing ceramic tile.

HIGH COMPRESSIVE STRENGTHS

Flow	40% flow @ 5 drops	100% flow @ 5 drops	120% flow @ 5 drops
Water Demand	3¼ qts. per 50 lbs.	3¾ qts. per 50 lbs.	4 qts. per 50 lbs.

COMPRESSIVE STRENGTH

3 Day	8,000 psi (55.2 MPa)	6,000 psi (41.4 MPa)	5,500 psi (37.9 MPa)
7 Day	10,000 psi (70.0 MPa)	7,500 psi (51.7 MPa)	6,500 psi (44.8 MPa)
28 Day	12,000 psi (82.7 MPa)	9,000 psi (62.1 MPa)	7,500 psi (51.7 MPa)

These are conservative data and individual applications will invariably yield higher strengths.