

# WRAPS & DISCS

## MTS Series Silicone Masking Tape for Powder Coating




Series MTS Masking Tape is a silicone rubber masking tape which bonds to itself, making it ideal for applications where dust-collecting adhesive residues are undesirable. In addition to withstanding temperatures up to 500°F (260°C), it is an excellent electrical insulator.




### MTS Red Masking Tape

Material: Silicone  
 Thickness: 20 Mil  
 Color: Red  
 Temperature: 500°F (260°C)



## DR Series Ding Ring Wrap-Arounds

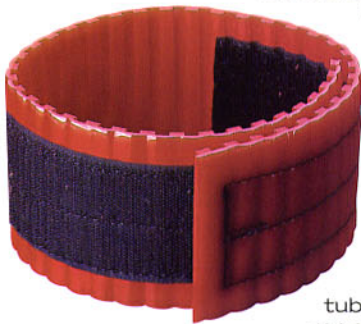

Developed as a quick, effective means of protecting gear and tube sections, Series DR Ding Ring wrap-around protectors are both ruggedly designed and easy to use. These universally adjustable rings come in one size capable of wrapping up virtually any size tube diameter. The soft, thick vinyl material offers excellent impact protection, preventing many of the dents and scratches often caused by contact with tools or handling racks. The reusable Series DR Ding Rings can be easily cleaned using a mild detergent. As a result, they can be used hundreds of times to provide years of product protection.

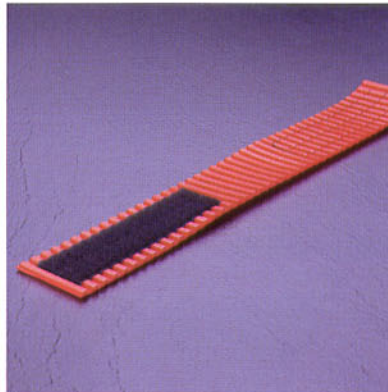

MATERIAL: Flexible PVC  
 COLOR\*: Red





## MTS Series

Caplug No.	Dimensions				Packaging				Caplug No.
	A		Length Per Roll		Standard Carton		No. of Rolls	Mini Pak Quantity	
	in	mm	yds	m	Shipping Wt. (Approx.)				
				lbs	kgs				
MTS 1-12	1.00	25.40	12	10.97	2	0.9	1	N/A	MTS 1-12

## DR Series


Caplug No.	Dimensions						Packaging				Caplug No.
	A		B		C		Standard Carton		No. of Pieces	Mini Pak Quantity	
	In	mm	In	mm	In	mm	Shipping Wt. (Approx.)				
						Lbs	Kgs				
DR-1	12.75	323.85	1.0	25.4	Fits Tube O.D. from 1 to 4	25.4-101.6	22	10.0	200	N/A	DR-1
DR-2	16.25	412.75	1.5	38.1	Fits Tube O.D. from 1 to 5	25.4-127.0	46	20.9	200	N/A	DR-2
DR-3	22.00	558.80	3.0	76.2	Fits Tube O.D. from 1 to 7	25.4-177.8	28	12.7	200	N/A	DR-3





# NETTING

## SW Series Standard Duty Tubular Sleeve-Web® Netting

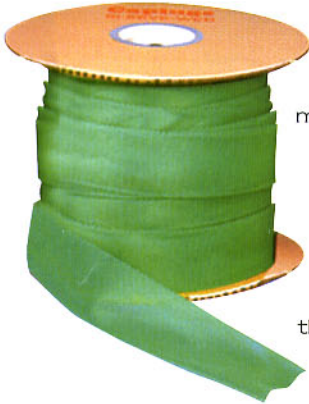

Standard Duty Sleeve-Web provides low-cost protection against physical damage to exterior surfaces of machined, polished, plated, coated, or threaded cylindrical parts. Its elasticity ensures a snug fit and a nonslip grip on straight-sided parts and those with tapered or varying contours. Web thickness is approximately .070" (1.78 mm).



MATERIAL: Low Density Polyethylene  
COLOR\*: See table on page 125

## SW Series Light Duty Tubular Sleeve-Web® Netting



Light Duty Sleeve-Web provides light duty protection. Ideal for irregular-shaped parts, it stretches easily to twice its diameter, while its elastic properties allow it to pull tightly around the smaller sections. Provides inexpensive, attractive, easily applied wrapping for long, narrow items such as wires, glass rods, tubing, and rolled paper. Web thickness is approximately .060" (1.52 mm).




MATERIAL: Low Density Polyethylene  
COLOR\*: See table on page 125

## SW Series Heavy Duty Tubular Sleeve-Web® Netting



Heavy Duty Sleeve-Web has a thicker extrusion, more strands, and closer spacing. It offers an extra measure of protection for valuable precision components like heavy duty truck parts, screw cylinders, spline shafts, couplings, roller bearing assemblies, pistons, and heavy threaded fittings. Eliminates the high cost and time-consuming labor associated with traditional protective wrappings like paper, cardboard, styrofoam or wood. Web thickness is approximately .080" (2.03 mm).

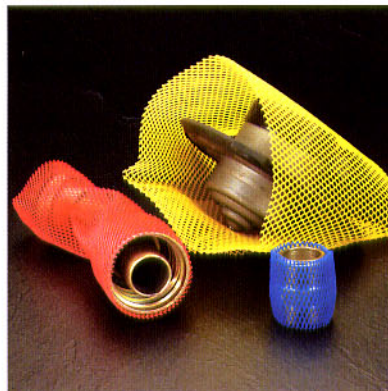

MATERIAL: Low Density Polyethylene  
COLOR\*: See table on page 125



## SW Series

Caplug No.	To Fit Outside Diameter		Color Code	Standard Coil		Mini Coil		Caplug No.
				42-48lb (19-22kg) Shipping Wt.		9-11lb (4-5kg) Shipping Wt.		
				Coil		Coil		
in	mm		ft	m	ft	m		
SW-03	1/4 to 3/8	6.35 - 9.53	Orange	3500	1066	700	213.0	SW-03
SW-04	3/8 to 3/4	9.53 - 19.05	Green	3000	914	600	180.0	SW-04
SW-05	1/2 to 1	12.70 - 25.40	Blue	2750	840	550	170.0	SW-05
SW-10	1 to 1 1/2	25.40 - 38.10	Red	1700	520	340	100.0	SW-10
SW-15	1 1/2 to 2	38.10 - 50.80	Black	900	270	180	55.0	SW-15
SW-20	2 to 2 1/2	50.80 - 63.50	White	800	240	160	50.0	SW-20
SW-25	2 1/2 to 3	63.50 - 76.20	Yellow	600	180	120	35.0	SW-25
SW-30	3 to 4	76.20 - 101.60	Green	450	140	90	30.0	SW-30
SW-40	4 to 5	101.60 - 127.00	Orange	350	110	70	20.0	SW-40
SW-50	5 to 6	127.00 - 152.41	Natural	250	80	50	15.2	SW-50
SW-64	6 1/4 to 7 1/2	158.76 - 190.51	Blue	250	80	50	15.2	SW-64
SW-75	7 1/2 to 9	190.51 - 228.61	Red	200	60	40	12.2	SW-75
SW-90	9 to 10	228.61 - 254.01	Yellow	200	60	40	12.2	SW-90

## SW Series

Caplug No.	To Fit Outside Diameter		Color Code	Standard Coil		Mini Coil		Caplug No.
				33-38lb (15-17kg) Shipping Wt.		7-8lb (3-4kg) Shipping Wt.		
				Coil		Coil		
in	mm		ft	m	ft	m		
SW-075-22	3/4 to 2	19.05 - 50.80	Yellow	1500	460	300	90.0	SW-075-22
SW-125-22	1 1/4 to 3	31.75 - 76.20	Blue	1000	300	200	60.0	SW-125-22
SW-200-22	2 to 4	50.80 - 101.60	Red	800	240	160	50.0	SW-200-22
SW-400-22	4 to 8	101.60 - 203.21	Blue	600	180	120	35.0	SW-400-22
SW-600-22	6 to 12	152.40 - 304.80	Natural	200	60	40	12.2	SW-600-22

## SW Series

Caplug No.	To Fit Outside Diameter		Color Code	Standard Coil		Mini Coil		Caplug No.
				33-38lb (15-17kg) Shipping Wt.		7-8lb (3-4kg) Shipping Wt.		
				Coil		Coil		
in	mm		ft	m	ft	m		
SW-050-66	1/2	12.70	White	2000	610	400	120	SW-050-66
SW-075-66	3/4	19.05	Orange	1500	460	300	90	SW-075-66
SW-100-66	1	25.40	Black	1200	370	240	75	SW-100-66
SW-125-66	1 1/4	31.75	Green	1000	300	200	60	SW-125-66
SW-150-66	1 1/2	38.10	Yellow	800	240	160	50	SW-150-66
SW-175-66	1 3/4	44.45	Grey	600	180	120	35	SW-175-66
SW-200-66	2	50.80	Blue	500	150	100	30	SW-200-66
SW-250-66	2 1/2	63.50	Red	500	150	100	30	SW-250-66
SW-300-66	3	76.20	Natural	450	135	90	27	SW-300-66






# NETTING

## PM Series Flat Sheet Netting


Flexible Series PM Net Sheetting provides excellent protection from impact or abrasion damage. Use as a separator for stacked parts during storage, handling and shipment, or as protective wrap for bulky items. Unlike wood, styrofoam or cardboard, it will not deteriorate in contact with solvents, coatings, slushing oils or rust-inhibitors.

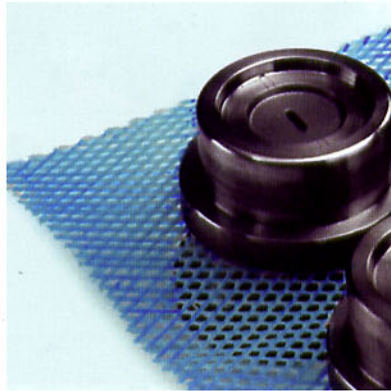

**MATERIAL:** Low Density Polyethylene  
**COLOR\*:** See table on page 127

## CSW Series Sleeve-Web® Netting


CSW Series Sleeve-Web® Netting conforms snugly around oxygen, acetylene and propane tanks, providing protection against unsightly scratches, minimizing rust build-up, and increasing time between repainting tanks. It also protects D.O.T.-mandated precautionary labels on gas cylinders from damage or accidental removal during handling.

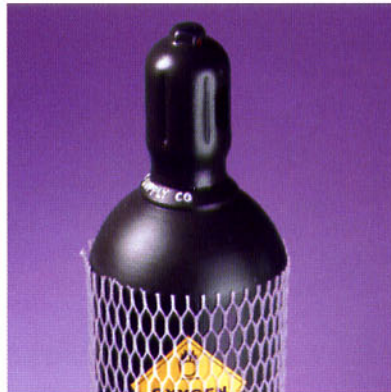


**MATERIAL:** Low Density Polyethylene  
**COLOR\*:** Natural/Clear

## CBW Series Cut Bottle-Web Netting

Series CBW is a tough yet flexible netting that provides surface and impact protection for bottles of any size and shape. Since the netting is extruded rather than woven, the strands will not separate, weaken or spread unevenly. The diamond mesh design allows for production in a wide range of strengths, stretch capabilities and elasticity to satisfy all types of protection needs.

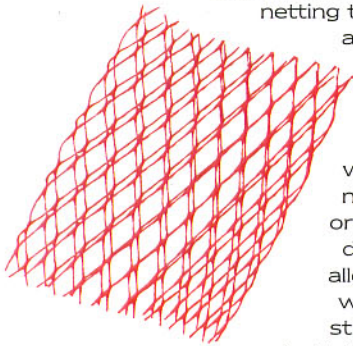

**MATERIAL:** Low Density Polyethylene  
**COLOR\*:** Natural

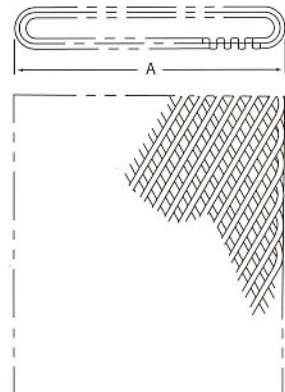



# NETTING

## PM Series

Caplug No.	Dimensions					Standard Coil		Shipping Wt. (Approx.)		Caplug No.
	Color Code	Mesh Thickness		Strands		Coil Size		lbs	kgs	
		in	mm	Per inch	Per cm	in x ft	cm x m			
PM-7007-18	Yellow	.07	1.78	7	2.8	18" x 125'	45.7cm x 38.0m	30	13.50	PM-7007-18
PM-7005-20	Blue	.07	1.78	5	2.0	20" x 150'	50.8cm x 45.6m	23	10.35	PM-7005-20
PM-7004-24	Red	.07	1.78	4	1.6	24" x 125'	61.0cm x 38.0m	28	12.60	PM-7004-24

## CSW Series

Caplug No.	Dimensions				Packaging			Caplug No.	
	To Fit Cylinder Diameter		Length		Standard Carton		Mini Pak Quantity		
	in	mm	in	mm	Shipping Wt. (Approx.)				No. of Pieces
CSW-4271-36	9	225.61	36	914.4	25	11.25	55	10	CSW-4271-36
CSW-4265-6	9	225.61	6	152.4	23	10.35	210	50	CSW-4265-6
CSW-4279-6	12 1/2	317.51	6	152.4	16	7.20	250	50	CSW-4279-6
CSW-4281-25	7	177.81	25	635.0	25	11.25	50	N/A	CSW-4281-25

## CBW Series

Caplug No.	Dimensions				Packaging			Caplug No.	
	To Fit Bottle Diameter		Length		Standard Carton		Mini Pak Quantity		
	in	mm	in	mm	Shipping Wt. (Approx.)				No. of Pieces
CBW-4293-7.0	3-5	76.2-127	7	177.8	7	3.2	400	N/A	CBW-4293-7.0
CBW-4293-10.0	3-5	76.2-127	10	254.0	8	3.6	400	N/A	CBW-4293-10.0